

Hardware



Flathead Screw

x4



Washer


x8



Hex Nut

x4

1

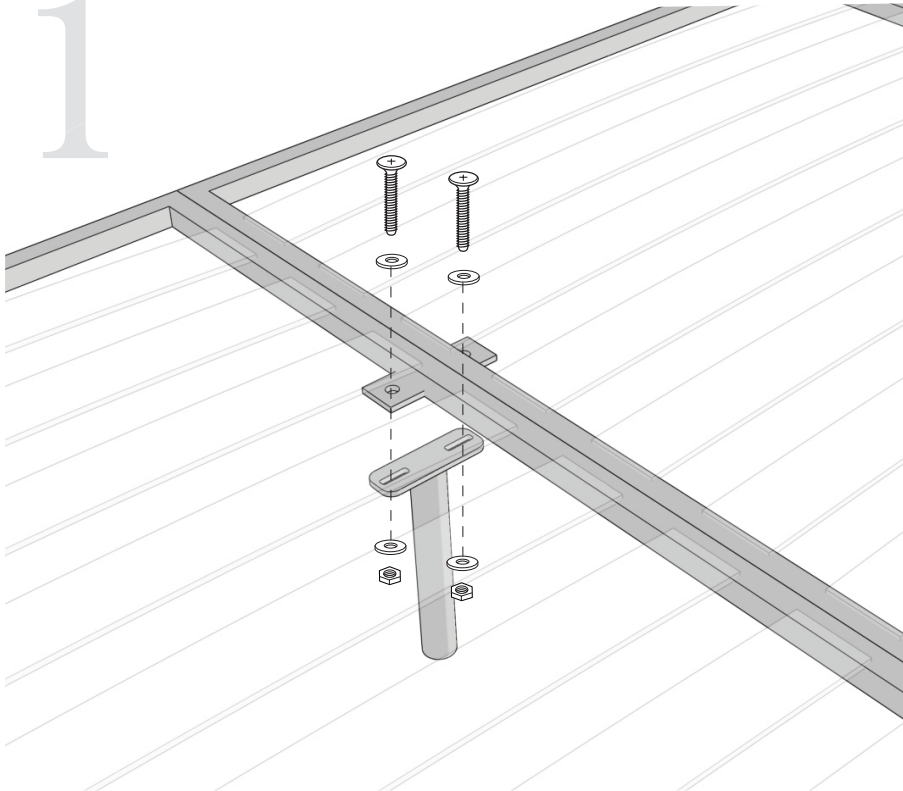

Install both support legs to bedstead using Flathead Screw, Washer, & Hex Nut. Tighten with Phillips screwdriver. (not included) Tighten all bolts to complete assembly.